

The products you need  
when you need them.



## TopWorx™ Express Shipping Program

Extensive offering of our most popular  
proximity sensors and switchboxes.



# The all-in-one proximity sensor and limit switch.

## GO gets it.


GO™ Switch proximity sensors are the most versatile sensing solution. They detect like a proximity switch and function like a limit switch, providing higher reliability when conventional switches fail.

### A global leader in valve control and proximity sensing

Emerson is a global leader in valve control and proximity sensing for the process industries. Our solutions enable plants, platforms, and pipelines to manage and control operations more intelligently and efficiently under the most demanding and extreme conditions.

Our solutions are highly versatile and can be used in various areas of a plant, like safety showers, access doors, lifts and elevators, conveyors, automated valves, manual valves, dampers, hydraulic and pneumatic cylinders, tank level indication, pressure relief valves, and cranes.

We are committed to providing you with an unmatched level of customer service, quality, and reliability. Find out more at [Emerson.com/Topworx](http://Emerson.com/Topworx)

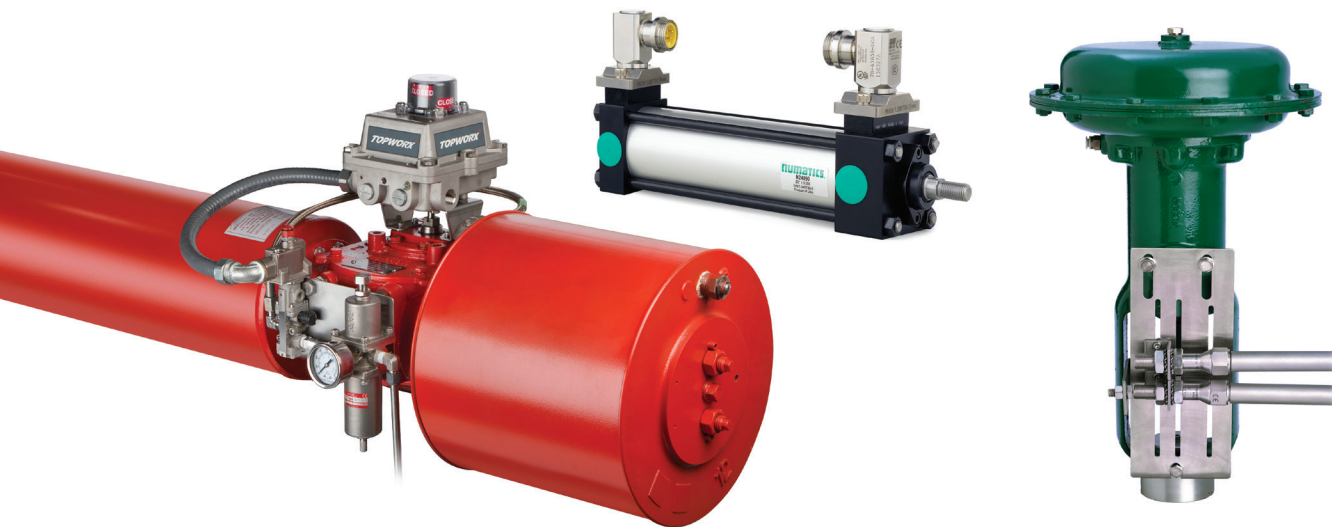

### GLOBAL TECHNOLOGY LEADERSHIP

TopWorx technology advancements are at the forefront of innovation in the process automation industry. TopWorx uses wireless technologies and fieldbus protocols such as FOUNDATION Fieldbus, DeviceNet, AS-Interface, Profibus, and HART to reduce installation costs and enable predictive maintenance.

### GLOBAL HAZARDOUS AREA CERTIFICATIONS

In addition to high temperature (204°C), cold temperature (-50°C), and sub-sea (7,010 meters) applications, TopWorx products are suitable for use in Flameproof/ Explosion Proof, Non-Incendive, Intrinsically Safe hazardous areas with IECEx, ATEX, GOST, InMetro, UL, CSA, KOSHA, and NEPSI certifications.

### GLOBAL SERVICE & SUPPORT

With company locations in the United States, United Kingdom, South Africa, Bahrain, and Singapore, TopWorx is strategically positioned to provide outstanding support. In addition, over 200 Certified Product Partners throughout the world are available to provide competent local support when needed.





## TopWorx Express Shipping Program guarantees the availability of the products you need, when you need them.

Customer service, quality, and delivery has been at the forefront of our commitment to our customers. We are now expanding on that commitment with the launch of the TopWorx Express shipping program, featuring our most popular GO Switch and TopWorx Switchbox products available for fast delivery.

### NEXT DAY

Orders with a maximum quantity of 10 pieces are guaranteed to ship the next business day.

Orders for next day shipment cannot be cancelled or adjusted once entered.

### 5 DAY

As part of our continued drive for customer service, we expanded the GO Switch Express program to include more products that will ship within five business days.

## TABLE OF CONTENTS

### Extended Sensing

11, 21 Series	4
Model 31	5
Model 81	6

### Precision Sensing

Model 52M	7
73, 75 Series	8
Model 74	9
Model 7LY	9
Model 7G	10
Model 7J	11

### Cylinder Position Sensing

7C, 7D, 7E Series	12
-------------------	----

### Switchbox

D-Series	13
T-Series	14

## 11, 21 Series Proximity Sensors



### Features

- Side sensing
- Gold flashed contacts
- Detects ferrous metal or magnetic targets (N)
- 304 stainless steel or coated brass enclosures
- Single Pole Double Throw (SPDT)
- Simple apparatus
- ½" NPT conduit entry

### Specifications

Operating Temperature	-50C to 105C
Power Rating	3A/24VDC, 10A/120VAC
Initial Contact Resistance	0.5 Ohm
Hysteresis (Differential)	8mm (5/16")

### NEXT DAY

Area Classification: CSA/FM Cl I, Div 2, Groups A-D; Cl II, Div 1, Groups E-G; Cl III

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
11-12110-00	14mm (9/16")	Behind Sensing Area	Coated Brass	Terminal Block ½" – 14 NPT
21-11110-00	9mm (3/8")	Behind Sensing Area	Coated Brass	Terminal Block ½" – 14 NPT

### 5 DAY

Area Classification: CSA/FM Cl I, Div 1, Groups A-D; Cl II, Div 1, Groups E-G; Cl III

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
21-11524-A2	9mm (3/8")	Bottom of Enclosure	304 Stainless Steel	18 Gauge, 36" Lead Wires

Area Classification: CSA/FM Cl I, Div 2, Groups A-D; Cl II, Div 1, Groups E-G; Cl III

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
11-11110-00	9mm (3/8")	Behind Sensing Area	Coated Brass	Terminal Block ½" – 14 NPT
11-12510-00	14mm (9/16")	Bottom of Enclosure	Coated Brass	Terminal Block ½" – 14 NPT
11-12110-00M	14mm (9/16")	Behind Sensing Area	Coated Brass	Terminal Block M20
11-12120-00	14mm (9/16")	Behind Sensing Area	304 Stainless Steel	Terminal Block ½" – 14 NPT
11-11510-00	9mm (3/8")	Bottom of Enclosure	Coated Brass	Terminal Block ½" – 14 NPT
21-11510-00	9mm (3/8")	Bottom of Enclosure	Coated Brass	Terminal Block ½" – 14 NPT

Area Classification: UL General Purpose

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
11-12118-00M	14mm (9/16")	Behind Sensing Area	Coated Brass	Terminal Block M20

# Model 31 Proximity Sensor

## Features

- End sensing
- Gold flashed contacts
- Detects ferrous metal or magnetic targets (N)
- 304 stainless steel
- Single Pole Double Throw (SPDT)
- Simple apparatus
- ½" NPT conduit entry

## Specifications

Operating Temperature	-50C to 105C
Power Rating	3A/24VDC, 4A/120VAC
Initial Contact Resistance	0.5 Ohm
Hysteresis (Differential)	6mm (1/4")



## NEXT DAY

Area Classification: cULus Cl I, Div 1, Groups A-D; Cl II, Div 1, Groups E-G; Cl III

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
31-17524-A2	6mm (1/4")	Bottom of Enclosure	304 Stainless Steel	18 Gauge, 36" Lead Wires

## 5 DAY

Area Classification: cULus Cl I, Div 1, Groups A-D; Cl II, Div 1, Groups E-G; Cl III

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
31-17524-B2	6mm (1/4")	Bottom of Enclosure	304 Stainless Steel	18 Gauge, 36" Cable

Area Classification: UL General Purpose

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
31-17528-A2	6mm (1/4")	Bottom of Enclosure	304 Stainless Steel	18 Gauge, 36" Lead Wires

# Model 81 Proximity Sensor

## Features

- End Sensing
- Gold flashed contacts
- Detects ferrous metal or magnetic targets (N)
- 304 stainless steel or coated brass enclosures
- Double Pole Double Throw (DPDT)
- Simple apparatus
- ½" NPT Conduit entry



## Specifications

Operating Temperature	-50C to 105C
Power Rating	3A/24VDC, 10A/120VAC
Initial Contact Resistance	0.5 Ohm
Hysteresis (Differential)	6mm (1/4")

## NEXT DAY

Area Classification: CSA Cl I, Div 1, Groups A-D; Cl I, Div 1, Groups E-G; Cl III

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
81-20524-A2	6mm (1/4")	Bottom of Enclosure	304 Stainless Steel	18 Gauge, 36" Lead Wires

Area Classification: CSA Cl I, Div 2, Groups A-D; Cl II, Div 2, Groups F,G; Cl III

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
81-20516-A2	6mm (1/4")	Bottom of Enclosure	Coated Brass	18 Gauge, 36" Lead Wires

## 5 DAY


Area Classification: CSA Cl I, Div 2, Groups A-D; Cl II, Div 2, Groups F,G; Cl III

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
81-20516-A3	6mm (1/4")	Bottom of Enclosure	Coated Brass	18 Gauge, 72" Lead Wires
81-20516-A4	6mm (1/4")	Bottom of Enclosure	Coated Brass	18 Gauge, 144" Lead Wires
81-20526-A3	6mm (1/4")	Bottom of Enclosure	304 Stainless Steel	18 Gauge, 72" Lead Wires

Area Classification: UL General Purpose

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
81-20528-A2	6mm (1/4")	Bottom of Enclosure	304 Stainless Steel	18 Gauge, 36" Lead Wires

## Model 52M Proximity Sensor

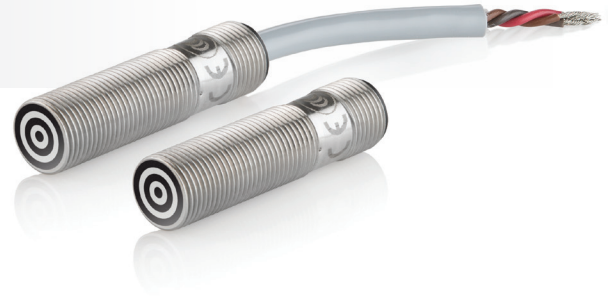

### Features

- End Sensing
- Gold flashed contacts
- Detects ferrous metal or magnetic targets (N)
- 316L stainless steel
- Single Pole Double Throw (SPDT)
- Simple apparatus

### Specifications

Operating Temperature	-40C to 100C
Power Rating	2A/24VDC, 2A/120VAC
Initial Contact Resistance	0.5 Ohm
Hysteresis (Differential)	0.2mm (0.008")

### NEXT DAY

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
52M-5610-B	1.5mm (0.060")	Bottom of Enclosure	316L Stainless Steel	22 Gauge, 2m Cable
52M-5610-D	1.5mm (0.060")	Bottom of Enclosure	316L Stainless Steel	4-pin M12 Quick Disconnect

## 73, 75 Series Proximity Sensors

### Features

- End sensing
- Palladium silver contacts
- Detects ferrous metal or magnetic targets (N)
- 316L stainless steel
- Single Pole Double Throw (SPDT)
- Simple apparatus
- ½" NPT conduit entry

### Specifications

Operating Temperature	-50C to 105C
Power Rating	3A/24VDC, 4A/120VAC
Initial Contact Resistance	0.5 Ohm
Hysteresis (Differential)	0.2mm (0.008")



### NEXT DAY

Area Classification: cULus Cl I, Div 1, Groups A-D, Cl II, Div 1, Groups E-G; Cl III

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
73-13564-B2	2.5mm (0.100")	Bottom of Enclosure	316L Stainless Steel	18 Gauge, 36" Cable

Area Classification: ATEX/IECEX Zone 1 Ex 'd', Hermetically Sealed

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
73-1356T-B2	2.5mm (0.100")	Bottom of Enclosure	316L Stainless Steel	18 Gauge, 36" Cable

### 5 DAY

Area Classification: UL Cl I, Div 1, Groups A-D, Cl II, Div 1, Groups E-G, Cl III

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
73-13563-B2	2.5mm (0.100")	Bottom of Enclosure	316L Stainless Steel	18 Gauge, 36" Cable
75-13563-B2	2.5mm (0.100")	Bottom of Enclosure	316L Stainless Steel	18 Gauge, 36" Cable

Area Classification: cULus Cl I, Div 2, Groups A-D, Cl II, Div 2, Groups E-G, Cl III

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
73-13566-B2	2.5mm (0.100")	Bottom of Enclosure	316L Stainless Steel	18 Gauge, 36" Cable

Area Classification: UL General Purpose

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
73-13568-B2	2.5mm (0.100")	Bottom of Enclosure	316L Stainless Steel	18 Gauge, 36" Cable
73-13568-DCA	2.5mm (0.100")	Bottom of Enclosure	316L Stainless Steel	3-pin Mini Quick Disconnect



## Model 74 Proximity Sensor

### Features

- End sensing
- Palladium silver contacts
- Detects ferrous metal or magnetic targets (N)
- 316L stainless steel
- Single Pole Double Throw (SPDT)
- Simple apparatus

### Specifications

Operating Temperature	-50C to 105C
Power Rating	3A/24VDC, 4A/120VAC
Initial Contact Resistance	0.5 Ohm
Hysteresis (Differential)	0.2mm (0.008")

### 5 DAY

Area Classification: UL General Purpose

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
74-13568-B2	2.5mm (0.100")	Bottom of Enclosure	316L Stainless Steel	18 Gauge, 36" Cable



## Model 7LY Dual LED Proximity Sensor

### Features

- End sensing
- Palladium silver contacts
- Detects ferrous metal or magnetic targets (N)
- 316L stainless steel
- Single Pole Double Throw (SPDT)
- Bright dual LED indication

### Specifications

Operating Temperature	-40C to 60C
Power Rating	250mA/24VDC, 250mA/120VAC
Initial Contact Resistance	0.5 Ohm
Hysteresis (Differential)	0.2mm (0.008")

### NEXT DAY

Area Classification: cULus Class I, Div 2, Groups A-D; Class II, Div 2, Groups F,G; Class III

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
7LY-1356E-B2	2.5mm (0.100")	Bottom of Enclosure	316L Stainless Steel	18 Gauge, 36" Cable



## Model 7G Proximity Sensor

### Features

- End Sensing
- Palladium silver contacts
- Detects ferrous metal or magnetic targets (N)
- 316L stainless steel
- Double Pole Double Throw (DPDT)
- Simple apparatus
- ½" NPT conduit entry

### Specifications

Operating Temperature	-50C to 105C
Power Rating	3A/24VDC, 4A/120VAC
Initial Contact Resistance	0.5 Ohm
Hysteresis (Differential)	0.2mm (0.008")



### NEXT DAY

Area Classification: UL Cl I, Div 1, Groups A-D, Cl II, Div 1, Groups E-G, Cl III

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
7G-23563-B2	2.5mm (0.100")	Bottom of Enclosure	316L Stainless Steel	22 Gauge, Cable

Area Classification: UL General Purpose

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
7G-23568-B2	2.5mm (0.100")	Bottom of Enclosure	316L Stainless Steel	22 Gauge, Cable

### 5 DAY

Area Classification: cULus Cl I, Div 1, Groups A-D, Cl II, Div 1, Groups E-G, Cl III

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
7G-23564-B2	2.5mm (0.100")	Bottom of Enclosure	316L Stainless Steel	22 Gauge, Cable

Area Classification: ATEX/IECEX Zone 1 Ex 'd'

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
7G-23569-B2	2.5mm (0.100")	Bottom of Enclosure	316L Stainless Steel	22 Gauge, Cable

Area Classification: UL General Purpose

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
7G-23568-DCH	2.5mm (0.100")	Bottom of Enclosure	316L Stainless Steel	7-pin Mini Quick Disconnect

## Model 7J Proximity Sensor with Integral Junction Box

### Features

- End sensing
- Palladium silver contacts
- Detects ferrous metal or magnetic targets (N)
- 316L stainless steel
- Single Pole Double Throw (SPDT)
- Simple apparatus
- ½" NPT conduit entry



### Specifications

Operating Temperature	-40C to 100C
Power Rating	2A/24VDC, 2A/120VAC
Initial Contact Resistance	0.5 Ohm
Hysteresis (Differential)	0.2mm (0.008")

### 5 DAY

Area Classification: UL Cl I, Div 1, Groups A-D, Cl I, Div 1, Groups E-G, Cl III

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
7J-13563-JSP	2.5mm (0.100")	Bottom of Enclosure	316L Stainless Steel	Terminal Block ½" – 14 NPT

Area Classification: cULus Cl I, Div 1, Groups A-D, Cl I, Div 1, Groups E-G, Cl III

Part Number	Sensing Range	Outlet Position	Enclosure Material	Wiring Option
7J-13564-JSP	2.5mm (0.100")	Bottom of Enclosure	316L Stainless Steel	Terminal Block ½" – 14 NPT

## 7C, 7D, 7E Series Cylinder Position Sensors

### Features

- End sensing
- Palladium silver contacts
- Detects ferrous metal or magnetic targets (N)
- 303 stainless steel
- 3,000 psi pressure rated
- Simple apparatus



### Specifications

Operating Temperature	-50C to 105C
Power Rating	3A/24VDC, 4A/120VAC
Initial Contact Resistance	0.5 Ohm
Hysteresis (Differential)	0.2mm (0.008")

### NEXT DAY

Area Classification: UL General Purpose

Part Number	Sensing Range	Probe Length	Contact Form	Outlet Position	Enclosure Material	Wiring Option
7C-43658-DCA	2.2mm (0.090")	26mm (1.025")	SPDT	Side Entry	303 Stainless Steel	3-pin Mini Quick Disconnect
7D-43658-DCA	2.2mm (0.090")	26mm (1.025")	SPDT	Side Entry	303 Stainless Steel	3-pin Mini Quick Disconnect
7E-43658-DCA	2.2mm (0.090")	52.4mm (2.062")	SPDT	Side Entry	303 Stainless Steel	3-pin Mini Quick Disconnect

### 5 DAY

Area Classification: UL General Purpose

Part Number	Sensing Range	Contact Form	Outlet Position	Enclosure Material	Wiring Option
7C-23658-DCA	2.2mm (0.090")	SPST bi-color LED	Side Entry	303 Stainless Steel	3-pin Mini Quick Disconnect
7E-23658-DCA	2.2mm (0.090")	SPST bi-color LED	Side Entry	303 Stainless Steel	3-pin Mini Quick Disconnect
7E-73658-DCA	2.2mm (0.090")	SPST	Side Entry	303 Stainless Steel	3-pin Mini Quick Disconnect

## D-Series Switchbox

### Features

- Reliable position feedback using TopWorx GO Switches
- Suitable for use in rotary and linear applications
- Global certification- NEC, CENELEC, IEC
- 12- point terminal strip



### NEXT DAY

Area Classification: Class I Division 1, Ex d; Tamb= -50° to 60°C

Model#	Enclosure	Sensor Option	Visual Indicator	Shaft	Conduit Entries	O-ring	Integrated Solenoid Valve
DXP-L21GNEB	Aluminum	(2) SPDT Hermetically Sealed GO™ Switch 3A@24VDC, 4A@120VAC	90° Green/Open, Red/Closed	316 SST NAMUR	(2) 3/4" NPT	Buna-N	None
DXP-L21GSEB	Aluminum	(2) SPDT Hermetically Sealed GO™ Switch 3A@24VDC, 4A@120VAC	90° Green/Open, Red/Closed	316 SST Standard 1/4" DD	(2) 3/4" NPT	Buna-N	None
DXP-Z21GNEB	Aluminum	(2) DPDT Hermetically Sealed GO™ Switch 3A@24VDC, 4A@120VAC	90° Green/Open, Red/Closed	316 SST NAMUR	(2) 3/4" NPT	Buna-N	None

### 5 DAY

Area Classification: Class I Division 1, Ex d; Tamb= -50° to 60°C

Model#	Enclosure	Sensor Option	Visual Indicator	Shaft	Conduit Entries	O-ring	Integrated Solenoid Valve
DXP-LX1GNEB	Aluminum	4-20mA with (2) SPDT Hermetically Sealed GO™ Switch 8.5-34VDC	90° Green/Open, Red/Closed	316 SST NAMUR	(2) 3/4" NPT	Buna-N	None
DXP-L21GNEB1A2	Aluminum	(2) SPDT Hermetically Sealed GO™ Switch 3A@24VDC, 4A@120VAC	90° Green/Open, Red/Closed	316 SST NAMUR	(2) 3/4" NPT	Buna-N	(1) 24VDC Coil, Aluminum, 1/4" NPT Ports, No MO
DXP-LH1GNEB	Aluminum	HART 4-20mA with (2) SPDT Hermetically Sealed GO™ Switch 15-39VDC	90° Green/Open, Red/Closed	316 SST NAMUR	(2) 3/4" NPT	Buna-N	None
DXS-L21GNEB	316 SST	(2) SPDT Hermetically Sealed GO™ Switch 3A@24VDC, 4A@120VAC	90° Green/Open, Red/Closed	316 SST NAMUR	(2) 3/4" NPT	Buna-N	None

## T-Series Switchbox



### Features

- Direct mount
- Low profile
- Global certification- NEC, CENELEC, IEC

### NEXT DAY

Area Classification: Class I Division 1, Ex d; Tamb= -50° to 60°C

Model#	Enclosure	Sensor Option	Visual Indicator	Shaft	Conduit Entries	O-ring	Integrated Solenoid Valve
TXP-Q21GNPM	Aluminum	(2) SPDT Hermetically Sealed G0™ Switch 3A@24VDC, 3A@120VAC	90° Green/Open, Red/Closed	NAMUR	(2) 1/2" NPT	Silicone	None

Area Classification: Class I Division 1, Ex ia; Tamb= -50° to 55°C

Model#	Enclosure	Sensor Option	Visual Indicator	Shaft	Conduit Entries	O-ring	Integrated Solenoid Valve
TVL-Q20GNPM	Aluminum	(2) SPDT Hermetically Sealed G0™ Switch 1A@24VDC	90° Green/Open, Red/Closed	NAMUR	(2) 1/2" NPT	Silicone	None

Area Classification: No Hazardous Area Approvals, Type 4/4X, IP66/68

Model#	Enclosure	Sensor Option	Visual Indicator	Shaft	Conduit Entries	O-ring	Integrated Solenoid Valve
TVL-Q2WGNPM	Aluminum	(2) SPDT Hermetically Sealed G0™ Switch 1A@24VDC	90° Green/Open, Red/Closed	NAMUR	(2) 1/2" NPT	Silicone	None

### 5 DAY

Area Classification: Class I Division 1, Ex d; Tamb= -50° to 60°C

Model#	Enclosure	Sensor Option	Visual Indicator	Shaft	Conduit Entries	O-ring	Integrated Solenoid Valve
TXP-G41GNPM	Aluminum	(4) SPDT Hermetically Sealed G0™ Switch 3A@24VDC, 3A@120VAC	90° Green/Open, Red/Closed	NAMUR	(2) 1/2" NPT	Silicone	None
TXP-M21GNEM	Aluminum	(2) SPDT Mech. Switch 10A@125/250VDC, 3A@24VDC	90° Green/Open, Red/Closed	NAMUR	(2) 3/4" NPT	Silicone	None

Area Classification: Class I Division 2, Ex nA nC; Tamb= -40° to 60°C

Model#	Enclosure	Sensor Option	Visual Indicator	Shaft	Conduit Entries	O-ring	Integrated Solenoid Valve
TVL-Q22GNPM	Aluminum	(2) SPDT Hermetically Sealed G0™ Switch 1A@24VDC	90° Green/Open, Red/Closed	NAMUR	(2) 1/2" NPT	Silicone	None

Area Classification: No Hazardous Area Approvals, Type 4/4X, IP66/68

Model#	Enclosure	Sensor Option	Visual Indicator	Shaft	Conduit Entries	O-ring	Integrated Solenoid Valve
TVA-M2WGNAM	Resin	(2) SPDT Mech. Switch 10A@125/250VDC, 3A@24VDC	90° Green/Open, Red/Closed	NAMUR	(2) 1/2" NPT	Silicone	None

# The TopWorx Family of Products



## GO™ Switch

Using a unique technology, GO Switch outperforms conventional limit switches and proximity sensors in the toughest applications. If your plant conditions are hot, cold, wet, dirty, abusive, corrosive, or explosive, be sure to specify GO Switch for a long, trouble-free life.



## Topworx™ Discrete Valve Controllers


TopWorx™ D-Series discrete valve controllers are certified for use in every world area. They carry IECEx, ATEX, UL, and CSA certifications in a single model, making it easier for global customers to standardize across plants in multiple world areas. Other certifications available include NEPSI, KOSHA, InMetro, and GOST. TopWorx™ D-Series discrete valve controllers can survive in virtually any plant condition. Their heavy-duty construction and corrosion resistance enable superior performance in the most demanding applications.



TopWorx™ T-Series switchboxes deliver outstanding value by providing full functionality in compact, direct-mount enclosures. Available with a variety of position sensors, integral solenoid valves, and bus networks, the T-Series is suitable for use in all hazardous areas and carry IECEx, ATEX, and CSA certifications.



TopWorx™ SIL-3 ESD Valve Controllers provide a complete Partial Stroke Test Solution with unique features and functionality that enable partial stroke testing of emergency shutdown valves without disrupting or shutting down the process.



The TopWorx™ K-Series switchbox gives you a compact, robust product that conforms to the latest European Directives. The use of quality materials and attention to detail in the design and manufacturing processes has resulted in an excellent reputation for reliability. The requirement for maintenance has been virtually eliminated.



## Wireless Safety Shower Monitoring Solution

The TopWorx™ Wireless Safety Shower Monitoring Solution combines two 10 Series, latching GO Switches with a Rosemount™ 702 Wireless Transmitter that provide on/off indication, time stamping, and automated reporting functions for safety shower/eyewash stations.



## VIP Brackets

With over 1,500 mounting kit designs, TopWorx™ products can be mounted on any rack-n-pinion, scotch-yoke, or vane actuator, quarter-turn manual valves, linear knife-gate and control valves, and positioners.

## Program Rules and Conditions:

- Express items limited to order size of 10 pcs or less.
  - Orders for 11 pcs or more (this also includes split line items of the same part number totaling more than 10 pcs) are not eligible for Express and will default to standard lead time.
  - Orders of Next-Day Express items received by 3:00 pm EST are guaranteed to ship the next business day or TopWorx will cover the cost of freight via the shipping method indicated and time of order.
  - Orders of 5-Day Express items received by 3:00 pm EST are guaranteed to ship within 5 business days or TopWorx will cover the cost of freight via the shipping method indicated and time of order.
  - Orders of Express items received after 3:00pm EST and international orders that require trade compliance screening may require an additional business day for processing
  - Orders of items meeting the Express criteria will automatically default to the Next-Day or 5-Day ship date, as applicable, unless the customer specifically requests a later ship date on the purchase order
  - Orders placed out of our Asia Pacific and European offices may require an additional 1-2 week lead-time in order to perform order review, processing, and shipping arrangements. Consult your respective TopWorx regional office for actual lead-time.
- Please contact your inside sales coordinator for more information.

# Our most popular proximity sensing and valve control available for next day shipment.



## TOPWORX™

Our industry leading valve control and position sensing technology provides absolute assurance in the most challenging applications by increasing reliability, profitability and reducing down time.

### Emerson Automation Solutions Americas

3300 Fern Valley Road  
Louisville, Kentucky 40213 USA  
+1 502 969 8000  
info.topworx@emerson.com

### Emerson Automation Solutions Asia-Pacific

1 Pandan Crescent  
Singapore 128461  
+65 6891 7550  
info.topworx@emerson.com

### Emerson Automation Solutions Europe, Middle East , Africa

Horsfield Way  
Bredbury Industrial Estate  
Stockport SK6 2SU United Kingdom  
+44 0 161 406 5155  
info.topworx@emerson.com



[Emerson.com/Topworx](https://www.emerson.com/Topworx)



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/EmersonAutomationSolutions](https://www.linkedin.com/company/EmersonAutomationSolutions)



[Twitter.com/EMR\\_Automation](https://twitter.com/EMR_Automation)

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners.  
© 2018 Emerson Electric Co. All rights reserved.  
ES-06408-1 R2 / Printed in the U.S.A. / 02/18



## CONSIDER IT SOLVED™